

# Ar Giyim YP

**Abraison resistant denim fabrics  
for motorcyclist and sandblasting suits**

**Cut-proof knit fabric**

**Bomb and nail proof woven fabrics**

**from HPPE**  
(high performance  
polyethylene)

**from p-aramid**

**from Pa6.6**



EN 388

**Cut Proof**



EN 17092

**Motorcyclist**



1975  
**ARITEKS**  
FUNCTIONAL TECHNICAL FABRICS

**Phone:** +90 212 538 05 98

**Fax:** +90 212 537 08 46

**E-Mail:** [support@ariteksinfo.com](mailto:support@ariteksinfo.com)

**Web:** [www.ariteks.net](http://www.ariteks.net)




Ariteks, founded as a family owned business in 1975, is the leading textile manufacturer company both in fashion and technical textiles.

By continuously developing high-end technologies it provides solutions to end users in apparel, protective workwear, functional sport, medical wear as well as technical textiles in construction and transportation industries.

As the pioneer company in special dyeing methods like indigo, vat, space-dye, coating and laminating systems, Ariteks produces highest-quality fabrics both for international and domestic markets.

Ariteks uses clean and renewable energy resources. It consumes minimum amount of water by using continuous optimised systems.

Based in 14000m<sup>2</sup> with 12 separate in house R&D laboratories, the company spends 5% of its budget for research and developing future technologies. It focuses especially on 3rd generation solar cells on flexible fabrics and biosensing textiles.

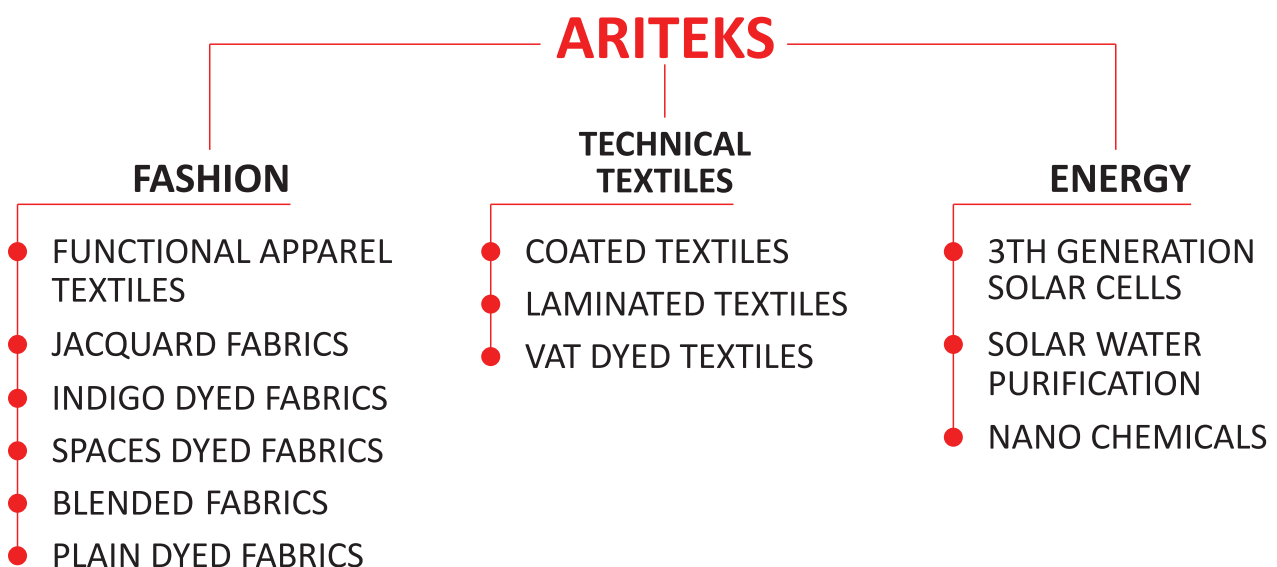

## CONTENT

<b>1</b>	<b>ArGiyim Knit Knife Pro</b> 250 gr/m <sup>2</sup> , 100% p-Aramid, Jersey Knit Fabric		4-5
<b>2</b>	<b>ArGiyim Denim Kursun</b> 290 gr/m <sup>2</sup> , 50% HPPE 50% Polyester, Denim Woven Fabric	 	6-7
<b>3</b>	<b>ArGiyim Denim Kursun CK</b> 620 gr/m <sup>2</sup> , 50% HPPE 50% Polyester, Double Denim Woven Fabric	 	8-9
<b>4</b>	<b>ArDura 500 CG</b> 350 gr/m <sup>2</sup> , 100% Pa 6.6, Herringbone Woven Fabric	 	10-11



250 gr/m<sup>2</sup>,  
100% p-Aramid Cut Proof,  
Jersey Knit Fabric



## Sample



**ArGiyim Knit Knife Pro - 6140  
Black**



**ArGiyim Knit Knife Pro - 5358  
Yellow**



**Description**

100% p-Aramid jersey knit fabric for motorcyclist linings.  
ArGiyim Knit Knife Pro can also be used for cut proof gloves.  
EN 388 certified.

**Technical Parameters**

Name	Values	Standards
Fiber	100% p-Aramid (p-AR)	EN ISO 2076
Yarn	24/2 Ne Combed	EN ISO 2060
Weight	250 ±5 gr/m <sup>2</sup>	EN ISO 3081
Width	1800 ±20 mm	EN ISO 3932
Bursting strength	> 2500 kPa(kN/m <sup>2</sup> )	EN ISO 13938-1
Dimensional Change	-5%<Length<+5%;-5%<Width<+5%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Peroxide Fastness	4-5	EN ISO 105 N02
Hot Press Fastness	4-5	EN ISO 105 X11
Light Fastness	4-5	EN ISO 105 B02
Perspiration Light Fast.	4-5	EN ISO 105 B07
pH	4.0-7.5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Motorcyclist Lining	
Quality Management	Done	ISO 9001
Cut-Proof	Done	EN 388



290 gr/m<sup>2</sup>,  
50% HPPE 50% Polyester,  
Abrasion Resistant,  
Denim Woven Fabric



## Sample



**ArGiyim Denim Kursun - 6032**  
**Navy**

**ArGiyim Denim Kursun - 6033**  
**Black**


### Description

50% HPPE (high performance polyethylene) 50% polyester denim twill fabric. The front side of the fabric is polyester which is ultra durable for sun light, the back side of the fabric is hppe which provides extra abraision resistance for motorcyclist's cloth. ArGiyim Denim Kursun can be used on abraision resistant cloths. EN 388 certified as cut proof. EN 17092 certified as motorcyclist norms.

### Technical Parameters

Name	Values	Standards
Fiber	50% HPPE (PE) 50% Polyester (PES)	EN ISO 2076
Yarn	13/1 Ne + 30/2 Ne	EN ISO 2060
Weight	290 ±20 gr/m <sup>2</sup>	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>2500N; Weft>3500N	EN ISO 13934-1
Tear Strength	Warp>150N; Weft>40N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Peroxide Fastness	4-5	EN ISO 105 N02
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4.0-7.0	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Motorcyclist Cloth	
Quality Management	Done	ISO 9001
Cut Proof	Done	EN 388
Motorcyclist	Done	EN 17092



620 gr/m<sup>2</sup>,  
50% HPPE 50% Polyester,  
Abrasion Resistant,  
Double Denim Woven Fabric



## Sample





**ArGiyim Denim Kursun CK  
6141 Navy**

**ArGiyim Denim Kursun CK  
6142 Black**


### Description

50% HPPE (high performance polyethylene) 50% polyester denim double twill fabric for sandblasting suits. The front side of the fabric is polyester which is ultra durable for sun light, the back side of the fabric is double hppe which provides extra abraision resistance for sandblasting clothing. ArGiyim Denim Kursun CK can be used on abraision resistant cloths. EN 388 certified as cut proof. EN 17092 certified as motorcyclist norms.

### Technical Parameters

Name	Values	Standards
Fiber	50% HPPE (PE) 50% Polyester (PES)	EN ISO 2076
Yarn	13/1 Ne + 30/2 Ne	EN ISO 2060
Weight	620 ±20 gr/m <sup>2</sup>	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>4500N; Weft>6500N	EN ISO 13934-1
Tear Strength	Warp>150N; Weft>240N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Peroxide Fastness	4-5	EN ISO 105 N02
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4.0-7.0	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Sandblasting Cloth	
Quality Management	Done	ISO 9001
Cut Proof	Done	EN 388
Sandblasting Suits	Done	EN 17092




350 gr/m<sup>2</sup>, 100% Pa 6.6,  
Water Repellent, Antibacterial,  
Herringbone Woven Fabric



## Sample



**ArDura 500 CG - 5991**  
**Black**



The technical data on this guide is given for information and correct at the time of design. It can be changed without prior notice.

## Description

ArDura 500 CG is 100% polyamide 6.6 woven fabric for bomb disposal suits, military, police and gendarme wear and nail proof pockets on workwear. The Pa6.6 high tenacity fibers gives for extra protection for bomb disposal clothing. The fabric has water and oil repellent function.

It's used mostly for application which requires ultra durability.

The antibacterial function is very usefull to eliminate all kind of odor formation during work.

























## Technical Parameters

Name	Values	Standards
Fiber	100% Polyamide 6.6 (PA 6.6)	EN ISO 2076
Yarn	500 Denier	EN ISO 2060
Weight	350 ±10 gr/m <sup>2</sup>	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>3500N; Weft>2500N	EN ISO 13934-1
Tear Strength	Warp>250N; Weft>220N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Abrasion Resistance	@50000	EN ISO 12947-2
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Peroxide Fastness	4-5	EN ISO 105 N02
Hot Press Fastness	4-5	EN ISO 105 X11
Light Fastness	4	EN ISO 105 B02
Weathering Fastness	6+	EN ISO 105 B04
pH	4.0-7.0	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Allergenic Dyestuffs	Not Detected	EN ISO 14362-1
Application	Bomb Disposal Suits	
Quality Management	Done	ISO 9001
Spray Test	ISO 5	EN ISO 24920
Antibacterial	99,99%	ASTM E2149

# Fashion Fabrics



# Technical Fabrics

  <b>BUILDING</b>	  <b>HOME</b>	  <b>PROTECTION</b>	  <b>MEDICAL</b>	  <b>SPORT</b>	  <b>TRANSPORT</b>
  <b>GEOLOGY</b>	  <b>PACKAGE</b>	  <b>CLOTH</b>	  <b>AGRICULTURE</b>	  <b>ENVIRONMENT</b>	  <b>MACHINE</b>

**Ariteks Fabric Factory**  
 Address: Velimese OSB Mah.210.Sokak,  
 No:9/8 59930, Ergene Tekirdag/Turkey  
 Phone: +90 282 676 41 90  
 Fax: +90 282 676 46 13  
 E-Mail: support@aritekinfo.com  
 Web: www.aritek.net