

ArMedi Medical Fabrics



Water and Oil
Repellent




Ariteks, founded as a family owned business in 1975, is the leading textile manufacturer company both in fashion and technical textiles.

By continuously developing high-end technologies it provides solutions to end users in apparel, protective workwear, functional sport, medical wear as well as technical textiles in construction and transportation industries.

As the pioneer company in special dyeing methods like indigo, vat, space-dye, coating and laminating systems, Ariteks produces highest-quality fabrics both for international and domestic markets.

Ariteks uses clean and renewable energy resources. It consumes minimum amount of water by using continuous optimised systems.

Based in 14000m² with 12 separate in house R&D laboratories, the company spends 5% of its budget for research and developing future technologies. It focuses especially on 3rd generation solar cells on flexible fabrics and biosensing textiles.

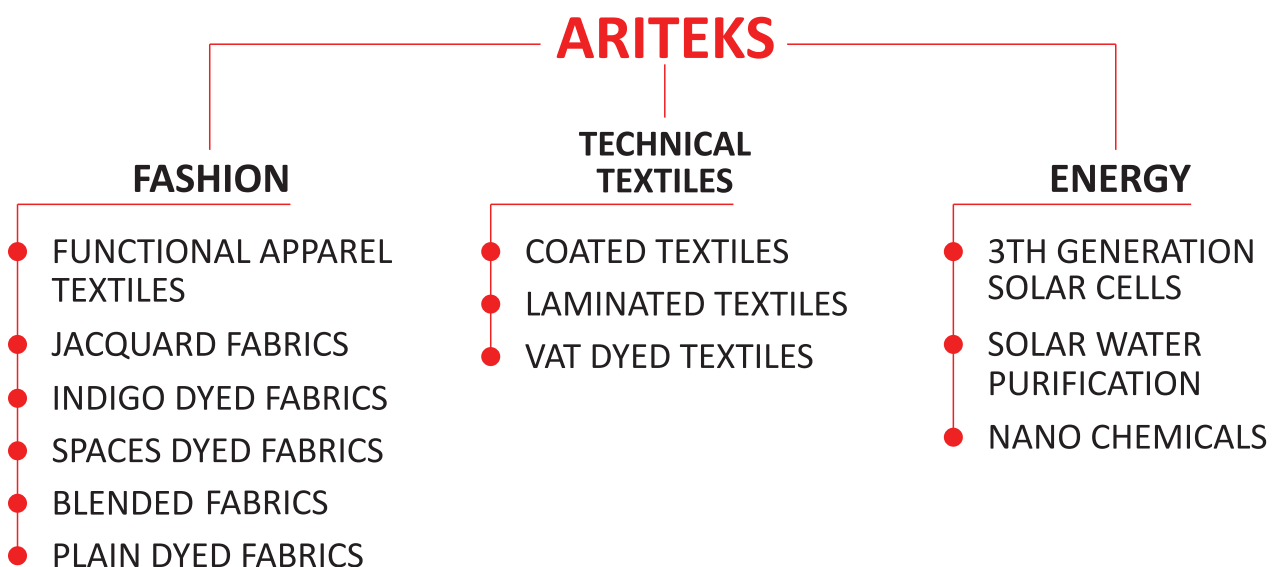

CONTENT

1	ArMedi		4-5
	180 gr/m ² , 75% Polyester 25% Viscose, 1/1 Plain Woven Fabric		





180 gr/m², 75% Polyester
25% Viscose,
Water and Oil Repellent
1/1 Plain Woven Fabric



Sample



**ArMedi - 5176
Blue**



**ArMedi - 5177
Green**



**ArMedi - 5178
White**



**ArMedi - 5179
Black**



**ArMedi - 5180
Navy**



The technical data on this guide is given for information and correct at the time of design. It can be changed without prior notice.

Description

ArMedi is 75% polyester 25% Viscose medical wear fabric. With viscose content it provides extra comfort for hospital and school workers. It is the most popular fabric for light uniforms usage. It has water and oil repellent functions with provides extra usage time.

























Technical Parameters

Name	Values	Standards
Fiber	75% Polyester (PES) 25% Viscose (CV)	EN ISO 2076
Yarn	20/1 Ne	EN ISO 2060
Weight	180±10 gr/m ²	EN ISO 3081
Width	1500 ±20 mm	EN ISO 3932
Tensile Strength	Warp>900N; Weft>700N	EN ISO 13934-1
Tear Strength	Warp>25N; Weft>20N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	6.2	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Medical Uniforms	
Quality Management	Done	ISO 9001
Water and Oil Repellent	4	EN ISO 4920

Fashion Fabrics



Technical Fabrics

  BUILDING	  HOME	  PROTECTION	  MEDICAL	  SPORT	  TRANSPORT
  GEOLOGY	  PACKAGE	  CLOTH	  AGRICULTURE	  ENVIRONMENT	  MACHINE

Ariteks Fabric Factory
 Address: Velimese OSB Mah.210.Sokak,
 No:9/8 59930, Ergene Tekirdag/Turkey
 Phone: +90 282 676 41 90
 Fax: +90 282 676 46 13
 E-Mail: support@aritekinfo.com
 Web: www.aritek.net